


6410 EDW-A/HEBA

Field of application:

Electric tools, angular grinders, hammer drills, lawn mowers, water pumps, Welding gen-set. Automatic shut down if low oil level is detected. One CEE-16A-3ph.-socket, one Schuko-socket, big welding plug sockets. Delivery with battery! Integrated Lorch Handy 200 welder, power and welding at the same time!

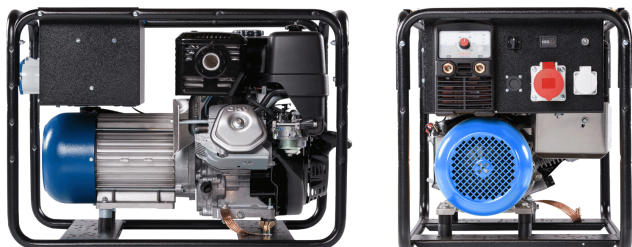

6410 EDW-A/HEBA	986231
Alternator type	Asynchronous
El. capacity: (3~) cos (phi) 1,0	5900 VA
El. capacity: (1~) cos (phi) 1,0	5000 VA
Voltage (3~)	400 V
Voltage (1~)	230 V
Voltage 3~	8,2 A
Current 1~ (Schuko)	16 A
Frequency	50 Hz
Protection class alternator	IP 54
Engine Type	GX390 Low Noise
Number of cylinders	1
Torque-speed	3000 U min-1
Fuel Type	Gasoline
Engine oli quantity	1,1 l
Engine power	7,5 kW
Cooling engine/alternator	Air/Air
Fuel capacity	6,5 l
Operating time : full load	2 h
Operating time : half load	3,5 h
Welding current	10- 200 A
Weight	102 kg
Electrodes	1,5 - 5 mm Ø
Length	740 mm
CEL	1,5 - 3,2 mm Ø
Noise power level	98 dB(A)
Width	500 mm
Noise pressure	70 dB(A)
Height	530 mm

